


Plate mounting castors

Brackets :

Heavy duty welded steel construction Stainless Steel, swivel bracket with threst ball bearing in the swivel head, Additionally reinforced by the integration of four specially shaped & harness bearing sets. Lubrication swivel head sealing, welded various strong, bolted & secured central king pin, bolted wheel axle with self locking nut

Wheels :

Made of Polyurethane wheel on waterproof precision ball bearing 2RS wheel center made of injected Polyurethane hardness 85 shore A & 95 shore A Non- marking smoothness & silence.

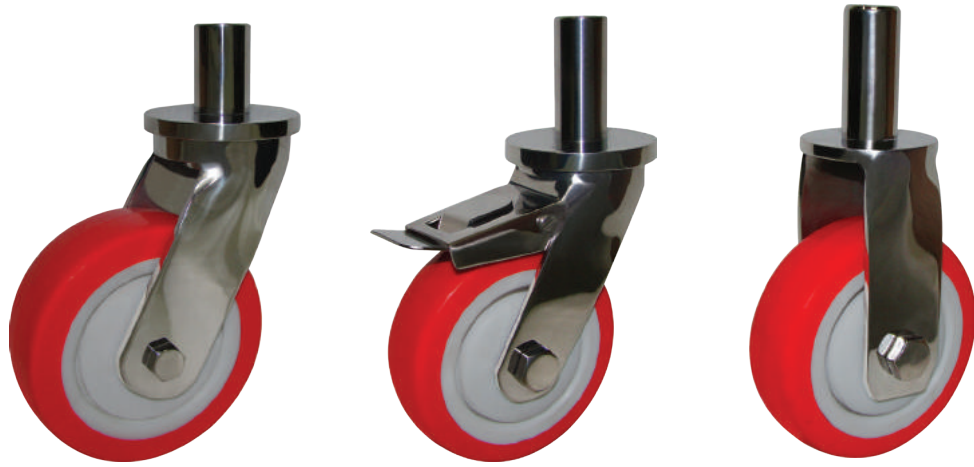

Color Available : 



Ref. Swivel Castors	Ref. Brake Castors	Ref. Fix Castors	Dia A	Width B	Load capacity Dynamic Kg	Load capacity Static Kg	Total Height H	Pin Size F	Stud Size F	Length L
H-APU-05025-SPIS	H-APU-05025-SPIL	H-APU-05025-SPIF	50	25	50	65	90	19	M10	50
H-APU-06525-SPIS	H-APU-06525-SPIL	H-APU-06525-SPIF	65	25	60	75	95	19	M11	50
H-APU-07525-SPIS	H-APU-07525-SPIL	H-APU-07525-SPIF	75	25	65	80	105	19	M12	50
H-APU-07532-SPIS	H-APU-07532-SPIL	H-APU-07532-SPIF	75	32	85	100	115	22	M12	50
H-APU-10032-SPIS	H-APU-10032-SPIL	H-APU-10032-SPIF	100	32	100	125	145	22	M12	50
H-APU-10038-SPIS	H-APU-10038-SPIL	H-APU-10038-SPIF	100	38	125	150	145	22	M16	50
H-APU-10050-SPIS	H-APU-10050-SPIL	H-APU-10050-SPIF	100	50	150	200	145	22	M16	50
H-APU-12532-SPIS	H-APU-12532-SPIL	H-APU-12532-SPIF	125	32	150	200	170	22	M16	50
H-APU-12538-SPIS	H-APU-12538-SPIL	H-APU-12538-SPIF	125	38	160	210	170	22	M16	50
H-APU-12550-SPIS	H-APU-12550-SPIL	H-APU-12550-SPIF	125	50	200	300	170	32	M20	50
H-APU-15050-SPIS	H-APU-15050-SPIL	H-APU-15050-SPIF	150	50	250	350	210	32	M20	50
H-APU-20050-SPIS	H-APU-20050-SPIL	H-APU-20050-SPIF	200	50	300	400	255	32	M20	50

UHMW Wheel

Phenolic resin wheel

Cast Nylon Wheel

Polyurethane wheel with Aluminium center wheel

Stainless steel wheel



H-UHMW-00000-SPIS



H-PR-00000-SPIS



H-CNY-00000-SPIS



H-PUA-00000-SPIS



H-SS-00000-SPIS

* All diamentions are in mm

Ref. Guide to Code Words :

H - Heavy Duty, APU - Polyurethane wheel, 00000 - Dia & width, S - Stainless steel, PI - Pin type, S - Swivel type, F - Fix type, L- Brake type