


Pin and stud mounting castors

Brackets :

Stainless steel (AISI 304) construction, swivel bracket with double ball bearing in the swivel head, welded very strong, bolted and secured central king pin, bolted wheel axle with self locking nut.

Wheels :

Made of Polyurethane wheel on waterproof precision ball bearing 2RS wheel center made of Nylon tread made of injected Polyurethane hardness 85shore A & 95 shore A Non-marking smoothness & silence.

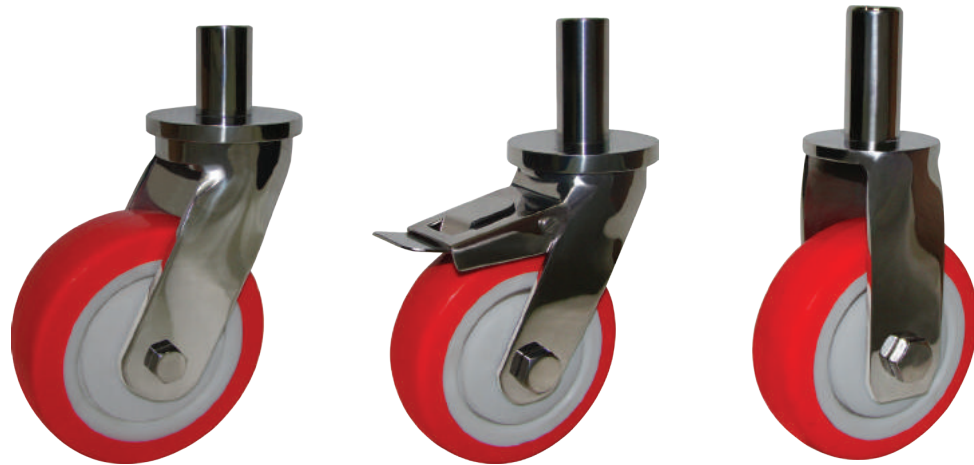

Color Available : 



Ref. Swivel Castors	Ref. Brake Castors	Ref. Fix Castors	Dia A	Width B	Load capacity Dynamic Kg	Load capacity Static Kg	Total Height H	Pin Size F	Stud Size F	Length L
M-APU-05025-SPIS	M-APU-05025-SPIL	M-APU-05025-SPIF	50	25	30	45	80	19	M10	50
M-APU-06525-SPIS	M-APU-06525-SPIL	M-APU-06525-SPIF	65	25	40	55	85	19	M11	50
M-APU-07525-SPIS	M-APU-07525-SPIL	M-APU-07525-SPIF	75	25	45	60	95	19	M12	50
M-APU-07532-SPIS	M-APU-07532-SPIL	M-APU-07532-SPIF	75	32	65	90	105	22	M12	50
M-APU-10032-SPIS	M-APU-10032-SPIL	M-APU-10032-SPIF	100	32	75	100	135	22	M12	50
M-APU-10038-SPIS	M-APU-10038-SPIL	M-APU-10038-SPIF	100	38	85	120	135	22	M16	50
M-APU-10050-SPIS	M-APU-10050-SPIL	M-APU-10050-SPIF	100	50	100	130	135	22	M16	50
M-APU-12532-SPIS	M-APU-12532-SPIL	M-APU-12532-SPIF	125	32	90	140	155	22	M16	50
M-APU-12538-SPIS	M-APU-12538-SPIL	M-APU-12538-SPIF	125	38	100	150	155	22	M16	50
M-APU-12550-SPIS	M-APU-12550-SPIL	M-APU-12550-SPIF	125	50	125	175	155	32	M20	50
M-APU-15050-SPIS	M-APU-15050-SPIL	M-APU-15050-SPIF	150	50	150	200	180	32	M20	50
M-APU-20050-SPIS	M-APU-20050-SPIL	M-APU-20050-SPIF	200	50	175	250	235	32	M20	50

UHMW Wheel



M-UHMW-00000-SPIS

Phenolic resin wheel



M-PR-00000-SPIS

Cast Nylon Wheel



M-CNY-00000-SPIS

Polyurethane wheel with Aluminium center wheel



M-PUA-00000-SPIS

Stainless steel wheel



M-SS-00000-SPIS

* All diamentions are in mm

Ref. Guide to Code Words :

M - Medium Duty, APU - Polyurethane wheel, 00000 - Dia & width, S - Stainless steel, PI - Pin type, S - Swivel type, F - Fix type, L - Brake type